

# HUDSON STREET OVER MILL CREEK BRIDGE REPLACEMENT, PIN 1762.89

Town of Johnsburg, Warren County, NY



Warren County, in cooperation with the New York State Department of Transportation (NYSDOT) is developing preliminary plans for the replacement of the Hudson St. bridge over Mill Creek.


This federally-funded project proposes to replace the existing steel multi-girder bridge with concrete deck founded on concrete gravity abutments, with a 54' steel multi girder with concrete deck founded on a pile supported concrete foundation. The replacement structure will include 9-foot travel lanes with 2-foot shoulders for a total rail-to-rail width of 22 feet. During construction, all traffic will be detoured off-site.

The estimated construction cost for this structure is \$2,050,000. Construction is anticipated to begin in the spring of 2027 and be completed by fall of 2027.

Separate communication will occur for private right-of-way discussions.


This informational flyer is being distributed as part of the continuing efforts by the NYSDOT and Warren County Department of Public Works to encourage public input into the development of transportation projects.

The draft design report will be available for viewing at Warren County Department of Public Works at 4028 Main Street, Warrensburg, NY. Additional copies of the flyer and comment form will be available to pick up at the DPW. Questions and comments can be provided using the attached comment form. Please provide comments to McFarland Johnson no later than August 15, 2025.

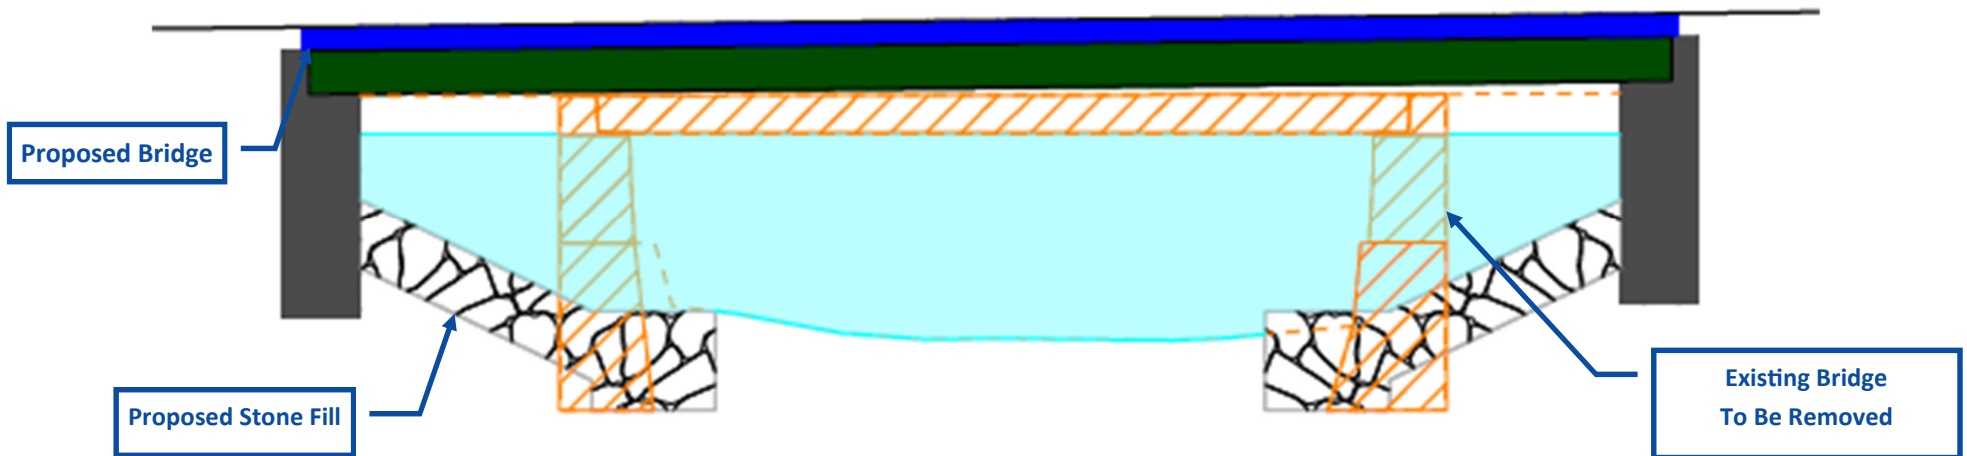

BRIDGE ELEVATION


# HUDSON STREET OVER MILL CREEK BRIDGE REPLACEMENT, PIN 1762.89

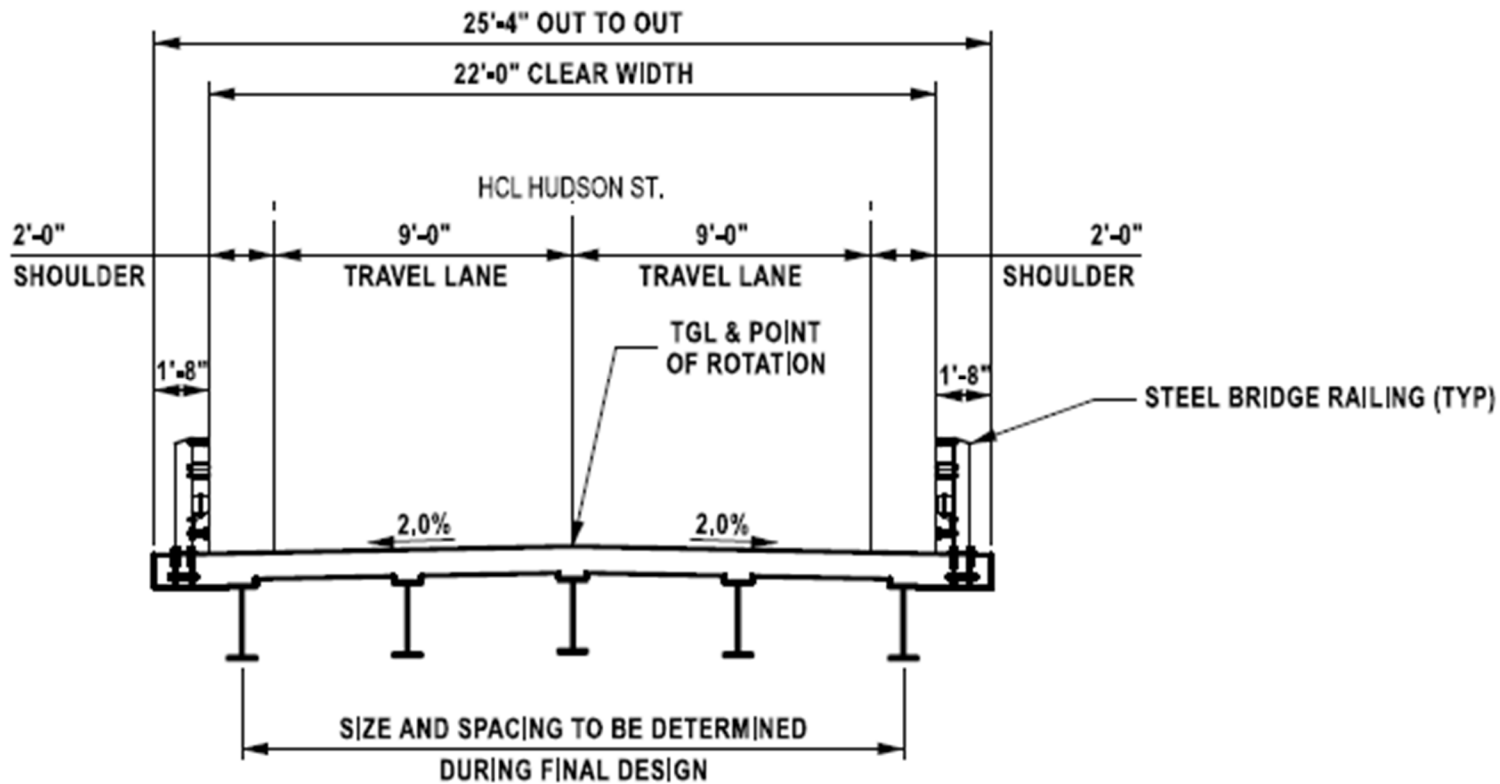

TYPICAL BRIDGE SECTION



# HUDSON STREET OVER MILL CREEK BRIDGE REPLACEMENT, PIN 1762.89

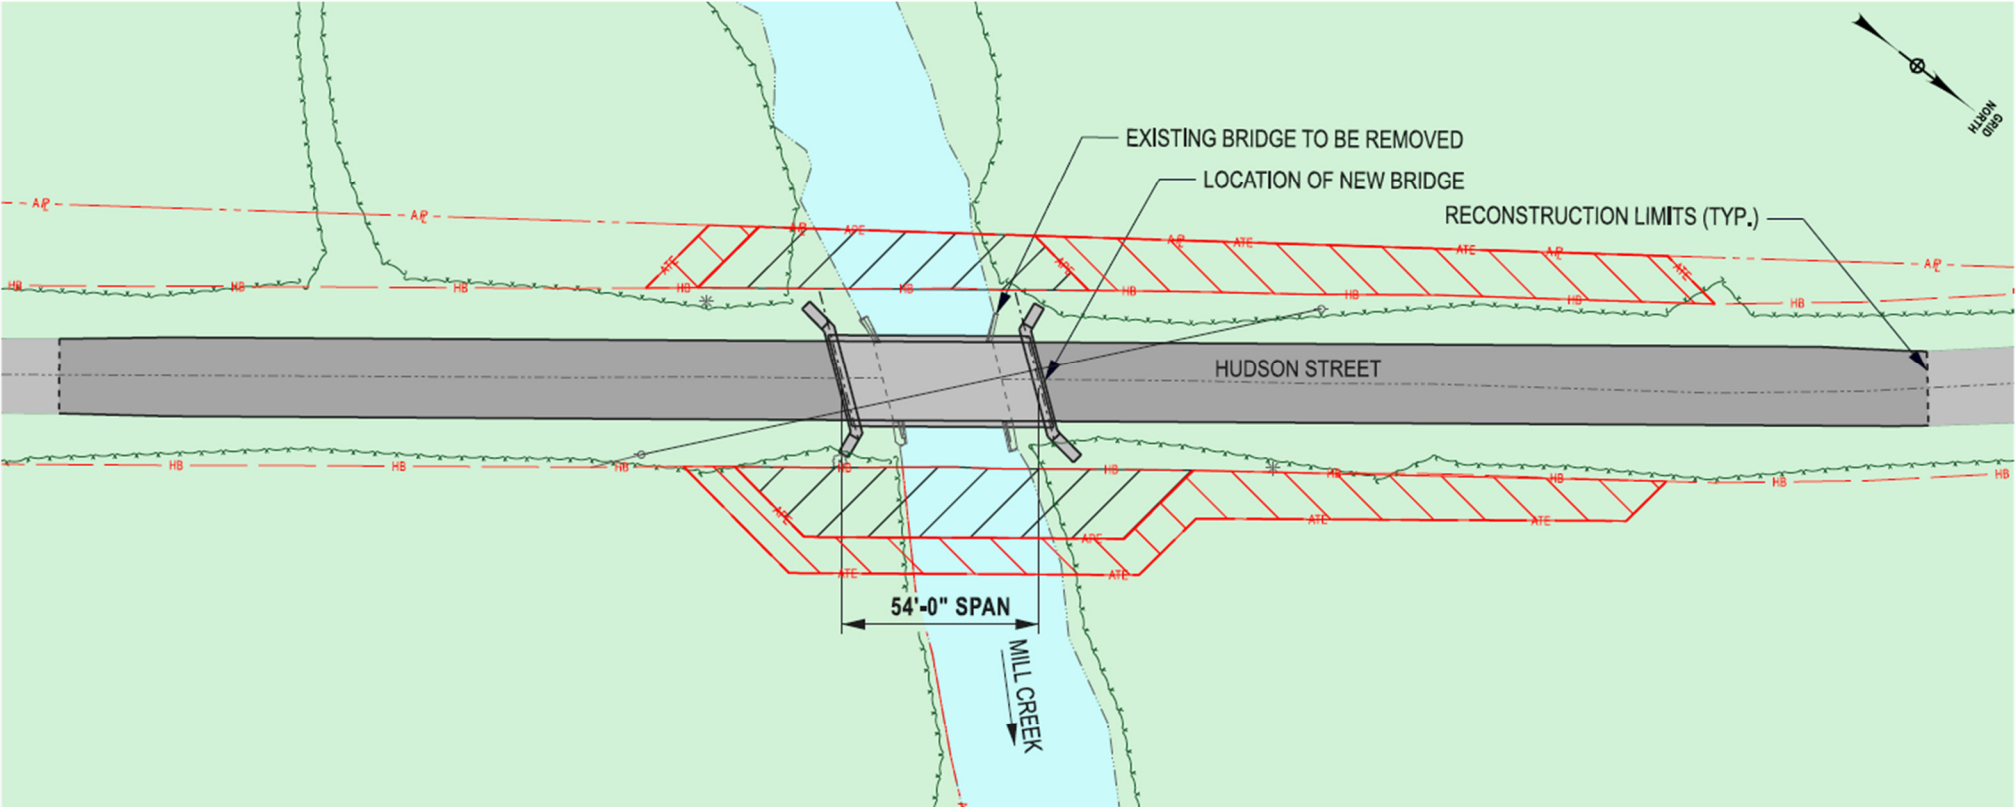


GENERAL PLAN

LEGEND

ASPHALT PAVEMENT	
BRIDGE STRUCTURE	
WOODLAND	
TEMPORARY EASEMENT	
PERMANENT EASEMENT	



# HUDSON STREET OVER MILL CREEK BRIDGE REPLACEMENT, PIN 1762.89

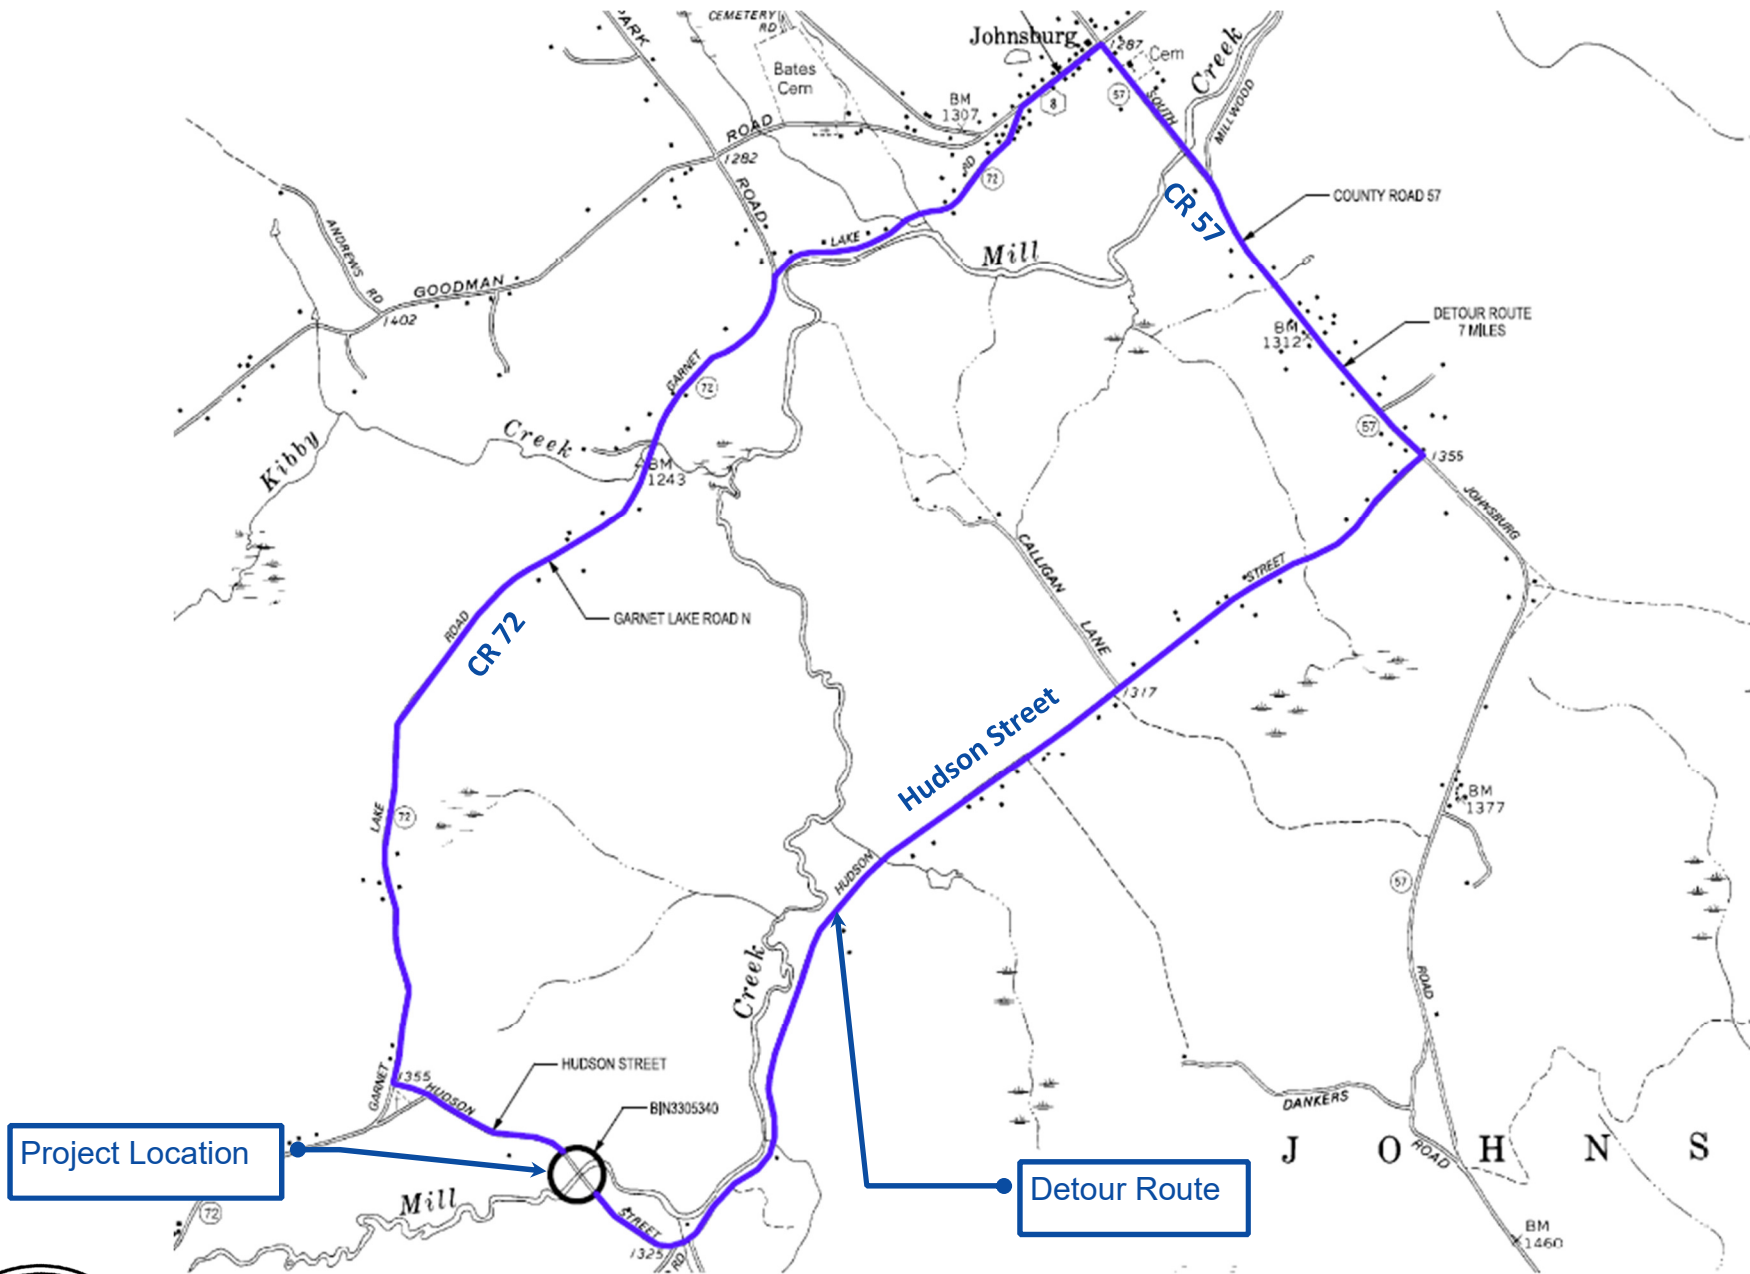

PROPOSED DETOUR MAP

